


BS 529 - LIFT SUSPENSION EYEBOLTS - OVAL

-TO BS 529 : PART 2

BFE 16

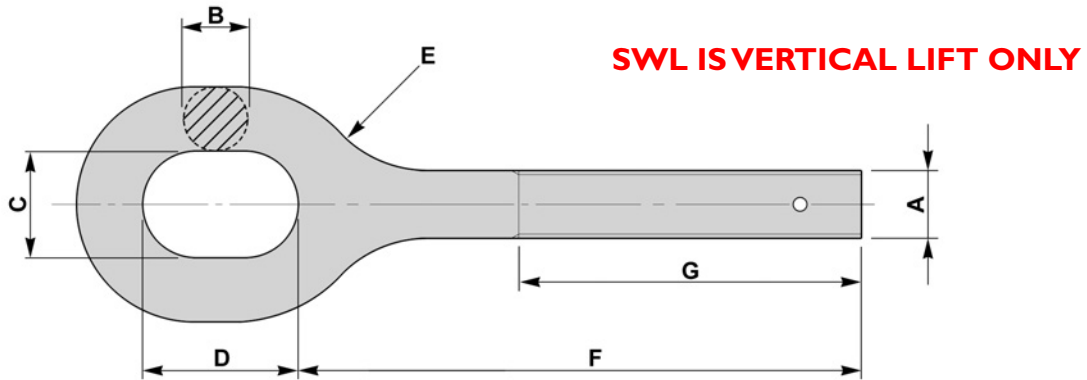

A		WIRE ROPE CIRC	SWL		PROOF LOAD		B	C	D	E	F	G	WEIGHT EACH
inches	mm	inches	cwt	kgs	cwt	kgs	inches	inches	inches	inches	inches	inches	kgs
3/8	(M10)	1	5	254	10	508	3/8	5/8	7/8	5/8	6 12	4. 1/2 9	0.16 0.25
1/2	(M12)	1. 1/4	8	406	16	812	1/2	3/4	1. 1/8	3/4	12 18 24	9 13. 1/2 18	0.43 0.59 0.76
5/8	(M16)	1. 1/2 - 1.3/4	15	762	30	1524	5/8	1	1.5/8	1	18 24 30	13. 1/2 18 22. 1/2	0.91 1.14 1.36
3/4	(M20)	2	20.5	1041	41	2082	3/4	1. 1/4	1.3/4	1. 1/4	18 24 30	13. 1/2 18 22. 1/2	1.42 1.76 2.10
7/8	(M22)	2. 1/4 - 2. 1/2	33	1676	66	3352	7/8	1. 1/2	2. 1/4	1. 1/2	18 24 30	13. 1/2 18 22. 1/2	2.04 2.50 2.95
1	(M24)	2. 3/4	38	1930	76	3860	1	1.5/8	2. 1/2	1.5/8	18 24 30	13. 1/2 18 22. 1/2	2.84 3.40 3.97
1. 1/8	(M27)	3	48	2438	96	4876	1. 1/8	1.3/4	2.3/4	1.3/4	18 24 30	13. 1/2 18 22. 1/2	3.86 4.65 5.45

() = METRIC THREADS - NON STANDARD

MATERIAL

BS970 080A27 (EN5A)

FINISH

**SELF COLOUR
GALVANISED
ELECTROPLATED
SHERARDISED
PTFE COATING**

**NON STANDARDS
AVAILABLE TO SUIT
CUSTOMER REQUIREMENTS**

BS 529 - LIFT SUSPENSION EYEBOLTS - OVAL

All content is subject to copyright © 2022