


CLOSED BODY RIGGING SCREWS

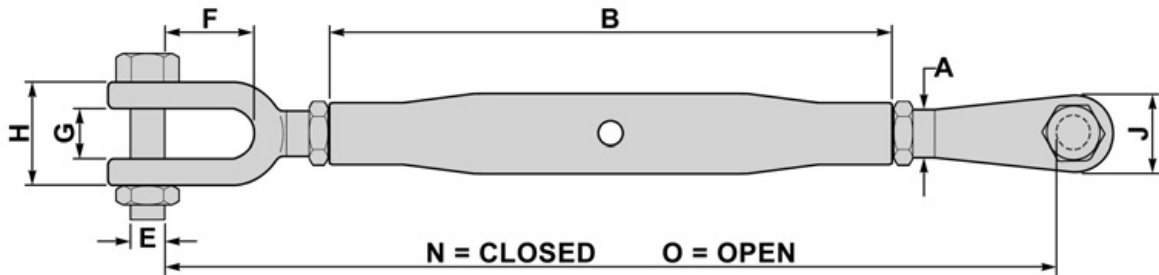

A	B	E	F	G	H	J	N	O	WLL	WT
Dia Thread	Length Body	Dia Pin	Length Inside	Opening Jaw	Width Jaw	Jaw Eye Dia	Length Closed	Length Open	Working Load Limit	Weight
mm	mm	mm	mm	mm	mm	mm	mm	mm	tons	kg
M6	100	5	16	7	20	13	170	250	0.20	0.15
M8	108	6	22	9	24	14	199	279	0.32	0.26
M10	125	8	22	10.5	28	19	222	312	0.50	0.45
M12	195	10	27	13	34	23	315	470	0.70	0.85
M16	230	12	33	18	42	29	388	568	1.20	1.51
M20	270	16	38	20	51	33	449	654	1.50	2.62
M22	295	20	45	25	55	38	490	715	2.20	3.94
M24	325	22	52	30	70	46	538	793	3.20	5.16
M33	370	30	70	38	82	60	680	965	4.80	11.60
M39	400	33	70	45	85	76	707	1002	6.00	14.20
M45	400	39	86	50	94	85	761	1011	8.50	20.80
M48	400	45	97	58	98	92	780	1005	11.00	24.00

MATERIAL: MILD STEEL | GALVANISED

SAFETY FACTOR: MBL EQUALS 5xWLL

