


EYEBOLTS WITH REDUCED EYE THICKNESS

BFE 10

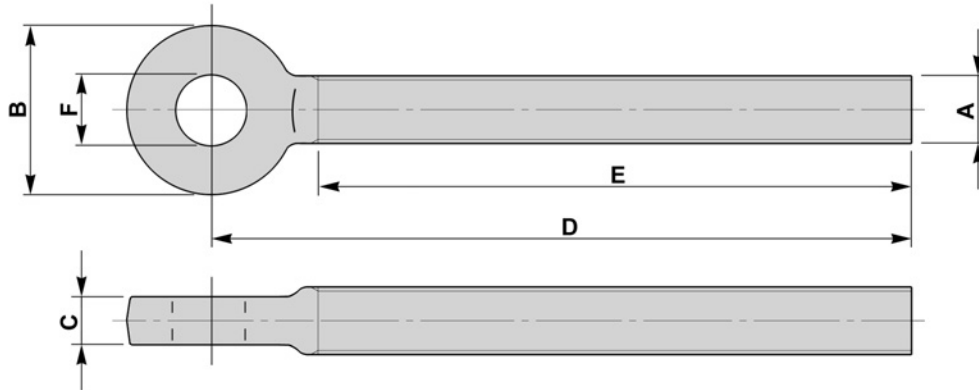

A		B	C		D		E		F
mm	inches	mm	MIN mm	MAX mm	MIN mm	MAX mm	MIN mm	MAX mm	
M8	5/16	19	5	7	30	800	15	200	To suit customers requirements Dimension "F" is generally drilled out to take corresponding dimension "A" of the same size
M10	3/8	22	6	9	34	900	15	200	
	3/8	25	6	9	34	900	15	300	
M12	1/2	25	6	11	40	1000	15	300	
	1/2	32	6	11	40	1000	15	450	
M16	5/8	32	7	15	45	1300	20	450	
	5/8	38	7	15	45	1300	20	500	
M20	3/4	38	7	19	55	1500	25	500	
	3/4	42	7	19	55	1500	25	500	
	3/4	50	7	19	60	1500	25	500	
M22	7/8	50	10	21	70	1500	30	500	
M24	1	50	12	22	75	1500	30	650	
	-	62	12	22	80	1500	35	650	
M27	-	60	13	25	80	1500	35	800	
M30	1. 1/8	60	13	28	80	1500	38	1000	
M33	1. 1/4	65	14	32	85	1500	40	1000	
M36	1. 3/8	65	16	35	95	2000	40	1500	
M39	1. 1/2	89	18	38	100	2000	45	1500	
M42	1. 5/8	90	20	40	110	2000	50	1500	

MATERIAL

CARBON STEELS
STAINLESS STEELS
ALLOY STEELS
B7, 4.6, 5.6, 8.8

FINISH

SELF COLOUR
GALVANISED
ELECTROPLATED
SHERARDISED
PTFE COATING

NON STANDARDS
AVAILABLE TO SUIT
CUSTOMER REQUIREMENTS