


SWIVEL EYEBOLTS - INCREASED EYE THICKNESS

BFE 15

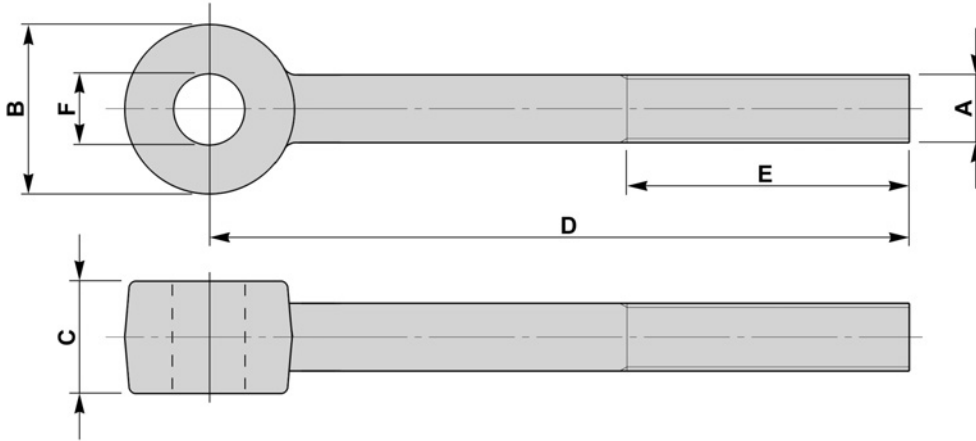

THREADS M6 - M12 (1/4" - 1/2")

A		B	C	D		E		F
mm	inches	mm	MIN mm	MIN mm	MAX mm	MIN mm	MAX mm	
M6	1/4	19	8	30	160	15	140	To suit customers requirements Dimension "F" is generally drilled out to take corresponding dimension "A" of the same size
		25	10	35	160	15	140	
		25	13	35	160	15	140	
M8	5/16	25	10	35	160	15	140	
		25	13	35	160	15	140	
		38	16	40	165	15	135	
		42	20	45	170	15	140	
M10	3/8	51	25	50	160	15	140	
		25	13	35	160	15	140	
		32	13	40	165	15	140	
		38	16	45	165	15	140	
		42	20	45	170	15	140	
		51	22	50	175	15	140	
M12	1/2	51	25	50	175	15	140	
		60	30	55	180	15	140	
		25	14	40	210	20	190	
		38	16	50	220	20	190	
		42	20	55	220	20	190	
		51	22	55	225	20	190	
		51	25	55	225	20	190	
62	24	60	230	20	190			
60	30	60	230	20	190			

MATERIAL
CARBON STEELS
STAINLESS STEELS
ALLOY STEELS
B7, 4.6, 5.6, 8.8


FINISH
SELF COLOUR
GALVANISED
ELECTROPLATED
SHERARDISED
PTFE COATING

**NON STANDARDS
AVAILABLE TO SUIT
CUSTOMER REQUIREMENTS**

SWIVEL EYEBOLTS - INCREASED EYE THICKNESS

SWIVEL EYEBOLTS - INCREASED EYE THICKNESS

BFE 15

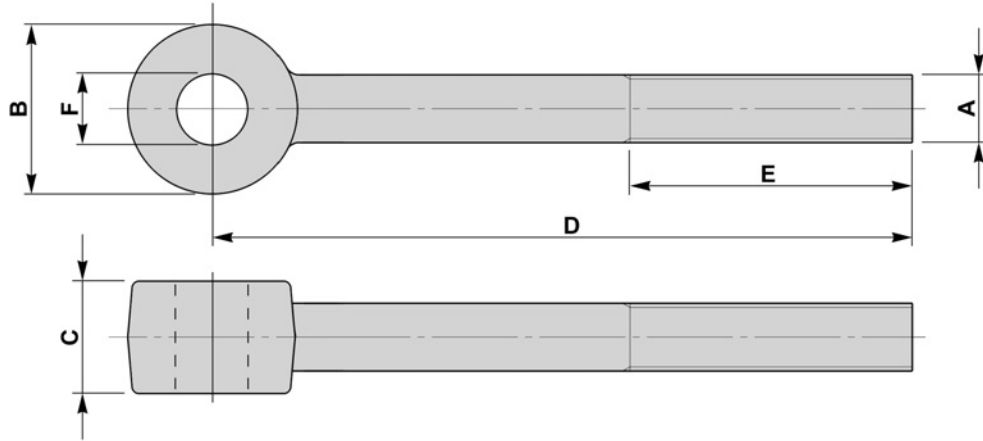

THREADS M16 - M36 (5/8" - 1.3/8")

A		B	C	D		E		F	
mm	inches	mm	MIN mm	MIN mm	MAX mm	MIN mm	MAX mm		
M16	5/8	35	17	45	1500	20	1400	To suit customers requirements Dimension "F" is generally drilled out to take corresponding dimension "A" of the same size	
		38	19	50	270	20	240		
		42	20	50	270	20	240		
		51	25	55	275	20	240		
		62	24	60	280	20	240		
		60	30	60	280	20	240		
M20	3/4	60	32	60	280	20	240		
		45	25	52	1500	25	1400		
		51	25	55	275	25	240		
		62	24	60	280	25	240		
M24	---	60	30	60	280	25	240		
		I	60	32	70	280	25		240
			60	32	70	280	30		240
M30	1. 1/8	60	38	70	280	30	240		
		60	38	70	280	30	240		
M33	1. 1/4	65	38	75	280	35	240		
M36	1. 3/8	65	38	80	1500	40	1400		

MATERIAL

CARBON STEELS
STAINLESS STEELS
ALLOY STEELS
B7, 4.6, 5.6, 8.8

FINISH

SELF COLOUR
GALVANISED
ELECTROPLATED
SHERARDISED
PTFE COATING

NON STANDARDS
AVAILABLE TO SUIT
CUSTOMER REQUIREMENTS