


EYE TO JAW TURNBUCKLES - GALVANISED

- FORMERLY U.S. FEDERAL SPECIFICATION

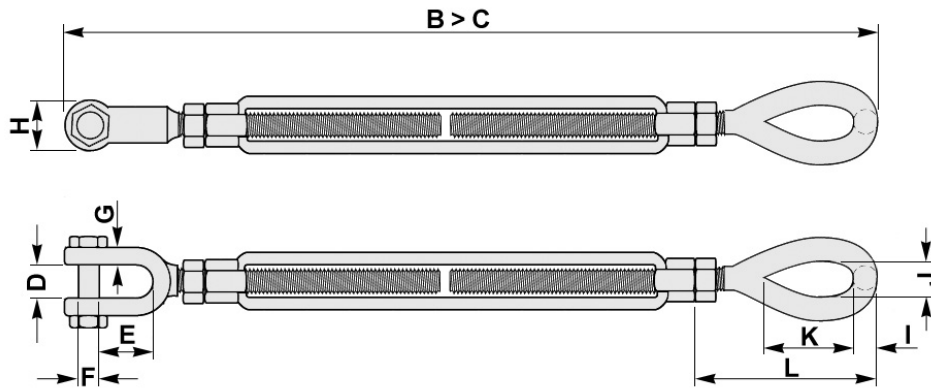

Thread Size A	Take Up	B	C	D	E	F	G	H	I	J	K	L	SWL Tonnes	Weight Each kgs
	inches													
3/8	6	302	416	13	22	8	8	21	9	13	28	65	0.54	0.34
1/2	6	338	452	16	26	9.5	10	25	12	18	36	80	1.00	0.69
1/2	9	414	585	16	26	9.5	10	25	12	18	36	80	1.00	0.78
1/2	12	490	719	16	26	9.5	10	25	12	18	36	80	1.00	0.93
5/8	6	394	508	18	33	13	13	33	14	21	43	98	1.59	1.07
5/8	9	470	641	18	33	13	13	33	14	21	43	98	1.59	1.39
5/8	12	546	775	18	33	13	13	33	14	21	43	98	1.59	1.71
5/8	18	701	1150	18	33	13	13	33	14	21	43	98	1.59	1.86
3/4	6	432	546	23	38	15.5	16	41	17	25	53	113	2.36	1.76
3/4	9	508	679	23	38	15.5	16	41	17	25	53	113	2.36	1.95
3/4	12	584	813	23	38	15.5	16	41	17	25	53	113	2.36	2.43
3/4	18	737	1080	23	38	15.5	16	41	17	25	53	113	2.36	2.98
7/8	12	625	854	27	44	19	18	48	20	31	59	118	3.27	3.52
7/8	18	778	1121	27	44	19	18	48	20	31	59	118	3.27	4.19
1	6	524	638	30	52	22	20	54	22	36	74	155	4.54	4.05
1	12	676	905	30	52	22	20	54	22	36	74	155	4.54	5.08
1	18	829	1172	30	52	22	20	54	22	36	74	155	4.54	6.03
1	24	980	1437	30	52	22	20	54	22	36	74	155	4.54	7.39
1. 1/4	12	760	989	44	73	29	25	67	29	45	88	197	6.90	8.80
1. 1/4	18	912	1255	44	73	29	25	67	29	45	88	197	6.90	11.00
1. 1/4	24	1064	1521	44	73	29	25	67	29	45	88	197	6.90	12.90
1. 1/2	12	823	1052	52	70	35	27	80	32	54	105	215	9.71	13.10
1. 1/2	18	975	1318	52	70	35	27	80	32	54	105	215	9.71	14.70
1. 1/2	24	1128	1585	52	70	35	27	80	32	54	105	215	9.71	17.80
1. 3/4	18	1060	1403	59	85	41	33	90	38	60	119	254	12.70	22.30
1. 3/4	24	1213	1670	59	85	41	33	90	38	60	119	254	12.70	27.50
2	24	1315	1772	64	93	51	39	108	45	60	146	308	16.78	42.90
2. 1/2	24	1486	1943	75	114	57	38	143	51	79	165	344	27.22	68.00
2. 3/4	24	1562	2019	89	110	70	42	156	57	83	178	381	34.02	91.00