


BS 3974 - U BOLTS - GRIP TYPE

BFF 24

- TO BS 3974 : PART I

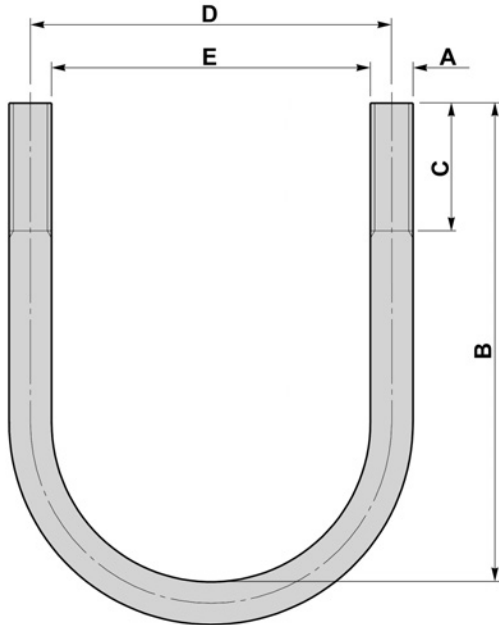

Nom Pipe Size	Pipe O.D	A	B	C	D	E
mm	mm	mm	mm	mm	mm	mm
15	21.3	M8	46	25	30	22
20	26.9	M8	56	25	35	27
25	33.7	M8	61	25	45	37
32	42.4	M8	71	25	55	47
40	48.3	M10	85	35	60	50
50	60.3	M10	95	35	75	65
65	76.1	M12	124	45	90	78
80	88.9	M16	142	50	105	89
100	114.3	M16	167	50	135	119
125	139.7	M16	192	50	160	144
150	168.3	M20	225	55	190	170
175	193.7	M20	250	55	215	195
200	219.1	M20	285	55	245	225
225	244.5	M20	300	55	270	250
250	273.0	M20	340	60	300	280
300	323.9	M20	390	60	350	330
350	355.6	M24	428	65	385	361
400	406.4	M24	488	65	435	411
450	457.0	M24	528	70	485	461
500	508.0	M24	588	70	540	516
550	559.0	M24	638	70	590	566
600	610.0	M24	688	70	640	616

MATERIAL

CARBON STEELS
STAINLESS STEELS
ALLOY STEELS
B7, 4.6, 5.6, 8.8

FINISH

SELF COLOUR
GALVANISED
ELECTROPLATED
SHERARDISED
PTFE COATING

**NON STANDARDS MADE
TO SUIT CUSTOMER
REQUIREMENTS
M6 - M100**

BS 3974 - U-BOLTS - GRIP TYPE

All content is subject to copyright © 2022